The World Of WALL PANEL







MULTI-FUNCTION





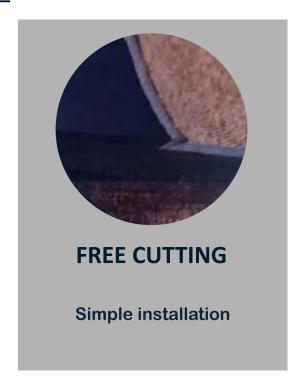



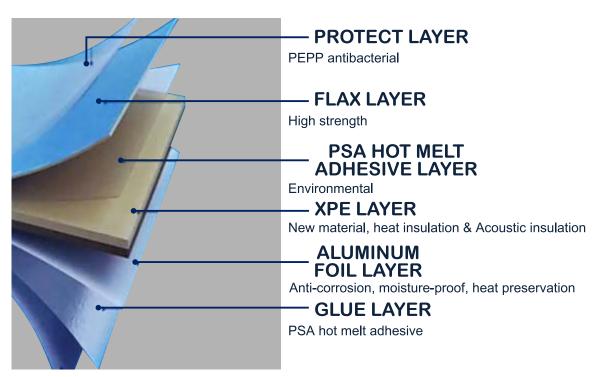

PRODUCT PARAMETERS

ITEM: Wall Cloth

THICKNESS: 5mm(±3%)

FUNCTION: Anti-Corrosion,

Moisture-Proof,

Heat Preservation,

Sound-Proof

INSTALL: Self Adhesive


MATERIAL: Flax+XPE

SIZE (W*L) /ROLL: 0.65*2.8m(±2%)


OPENING THE GOOD LIFE



STEP 1
MEASURE THE HEIGHT
OF THE WALL TO
DETERMINE WHETHER
THE HEIGHT IS WITHIN 2.8M




STEP 2
TEAR OFF THE BACK PAPER ABOUT 10CM
FROM THE BACK OF THE PRODUCT AND
STICK IT TO THE WALL. THE TOP MUST BE
ALIGNED. TEAR THE BACK PAPER AND STICK
IT AT THE SAME TIME, IT CAN BE SMOOTHED
BY HAND OR FLAT APPLIANCE




STEP 3
STICK IT TO THE BOTTOM, CUT OF THE EXCESS PART NEATLY WITH AN ART KNIFE, AND THEN SMOOTHEN IT




STEP 4
TEAR OFF THE STICKER ON THE BACK OF
THE DECORATIVE STRIP,STICK IT DIRECTLY
ON THE WALL ALONG ONE SIDE OFTHE
PRODUCT, ALIGN, STICK
AND SMOOTHEN IT




STEP 5
OPEN ONE ROLL AGAIN, ALIGN, PASTE
AND SMOOTHEN ALONG ONE SIDE OF
THE DECORATIVE STRIP




STEP 6
REPEAT THE ABOVE STEPS AND PAY
ATTENTION TO THE FLATNESS OF THE
JOINT TO ACHIEVE THE
BEST PRODUCT EXPERIENCE



STEP 7
CHECK THE PRODUCTS ON THE WALL
AND COMPLETE THE PASTING



STEP 8
YOU CAN ALSO PUT DECORATIVE STRIP
LINE THIS WAY AS SHOWN
IN PICTURE ABOVE




Decorative strip optional color







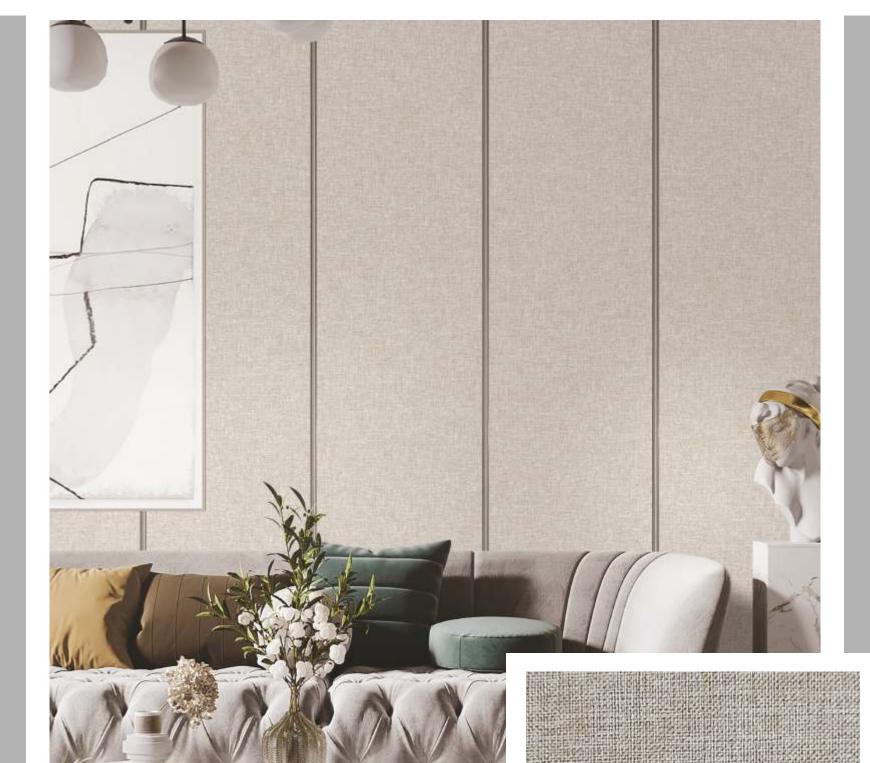




















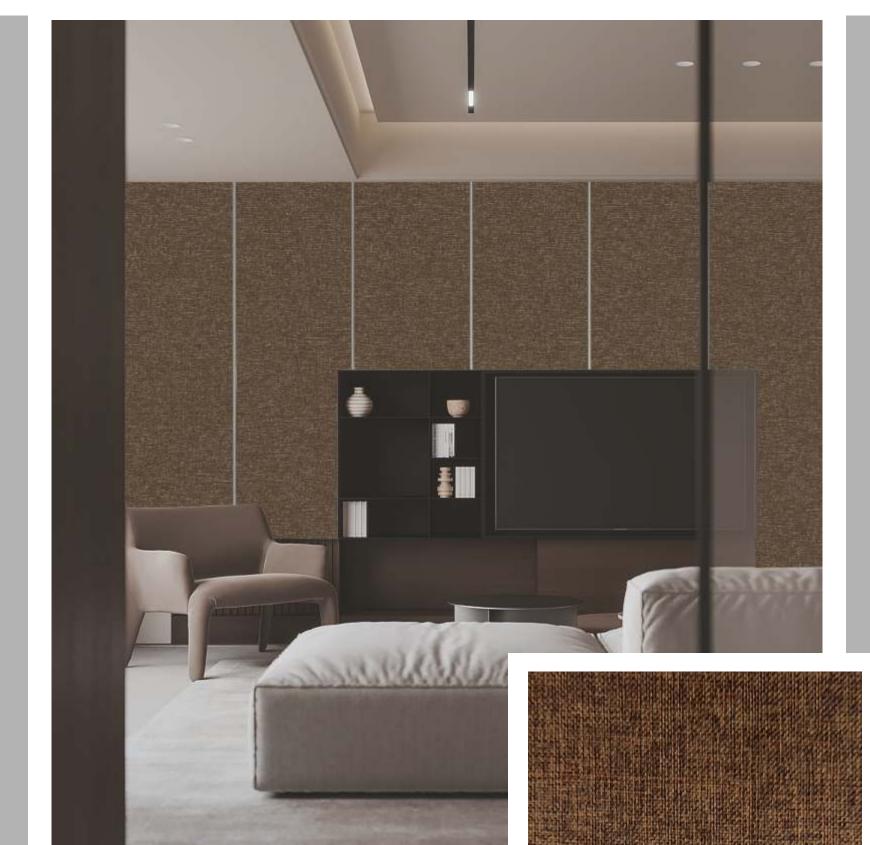












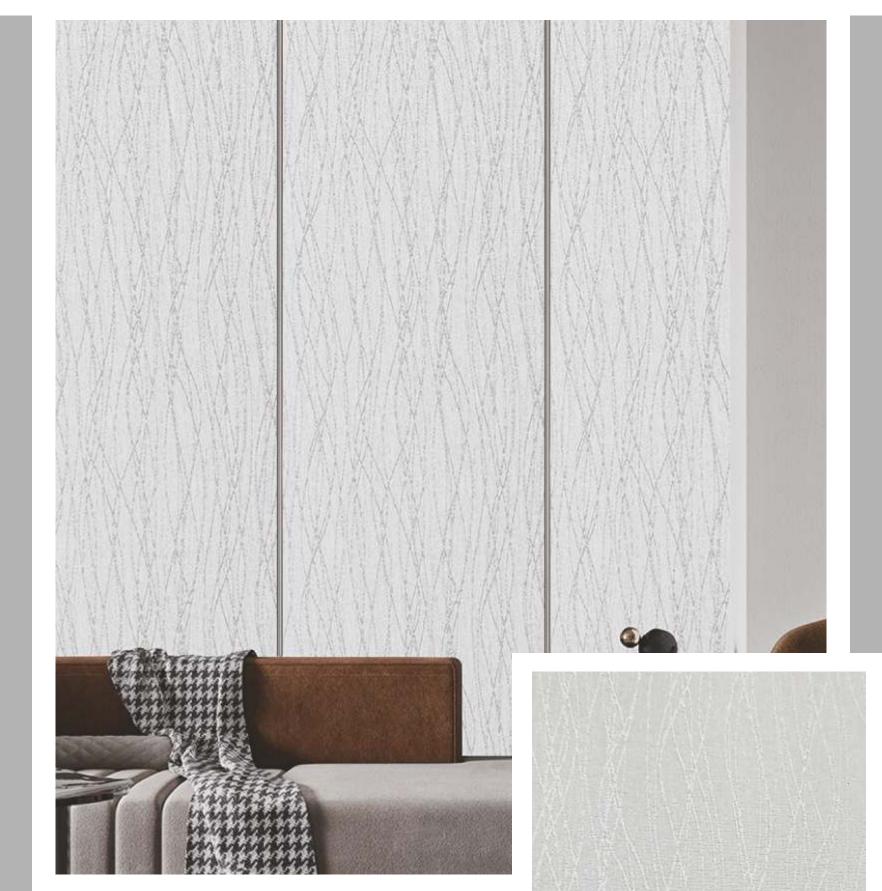










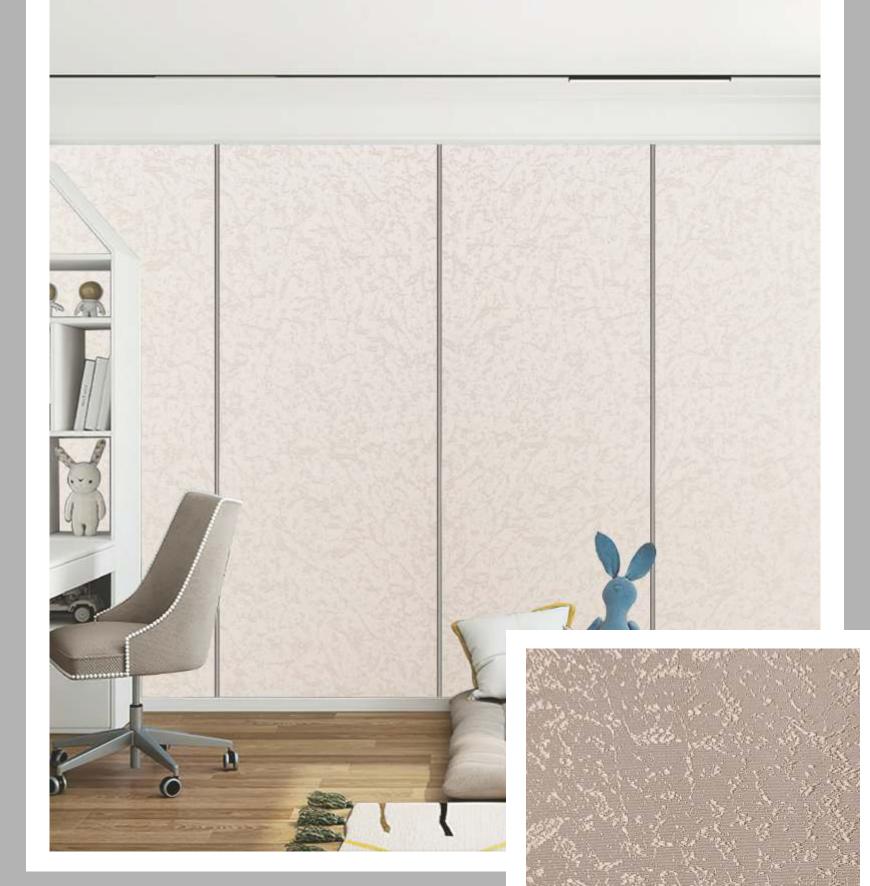

















To Stay Connected

Follow Us









www.stcwallpaper.com

